

3045 - 100% Extension

Closed Length ± 0.5 mm
 Extension length ± 3 mm
 F ± 0.5 mm

Recommended fastening screws ISO 7380 M4 sliding element, ISO7380 M5 bottom element. If use of other fastening screw for bottom element use max size M5 and make sure the head of the screw fits inside the guide.


*Inner rail can be demounted to facilitate assembly or maintenance. It is important that the rail is remounted only on its original telescopic slide.

System Load Capacity value refers to a pair of rails.
 All dimensions in mm.

Extension: 100%




General Data

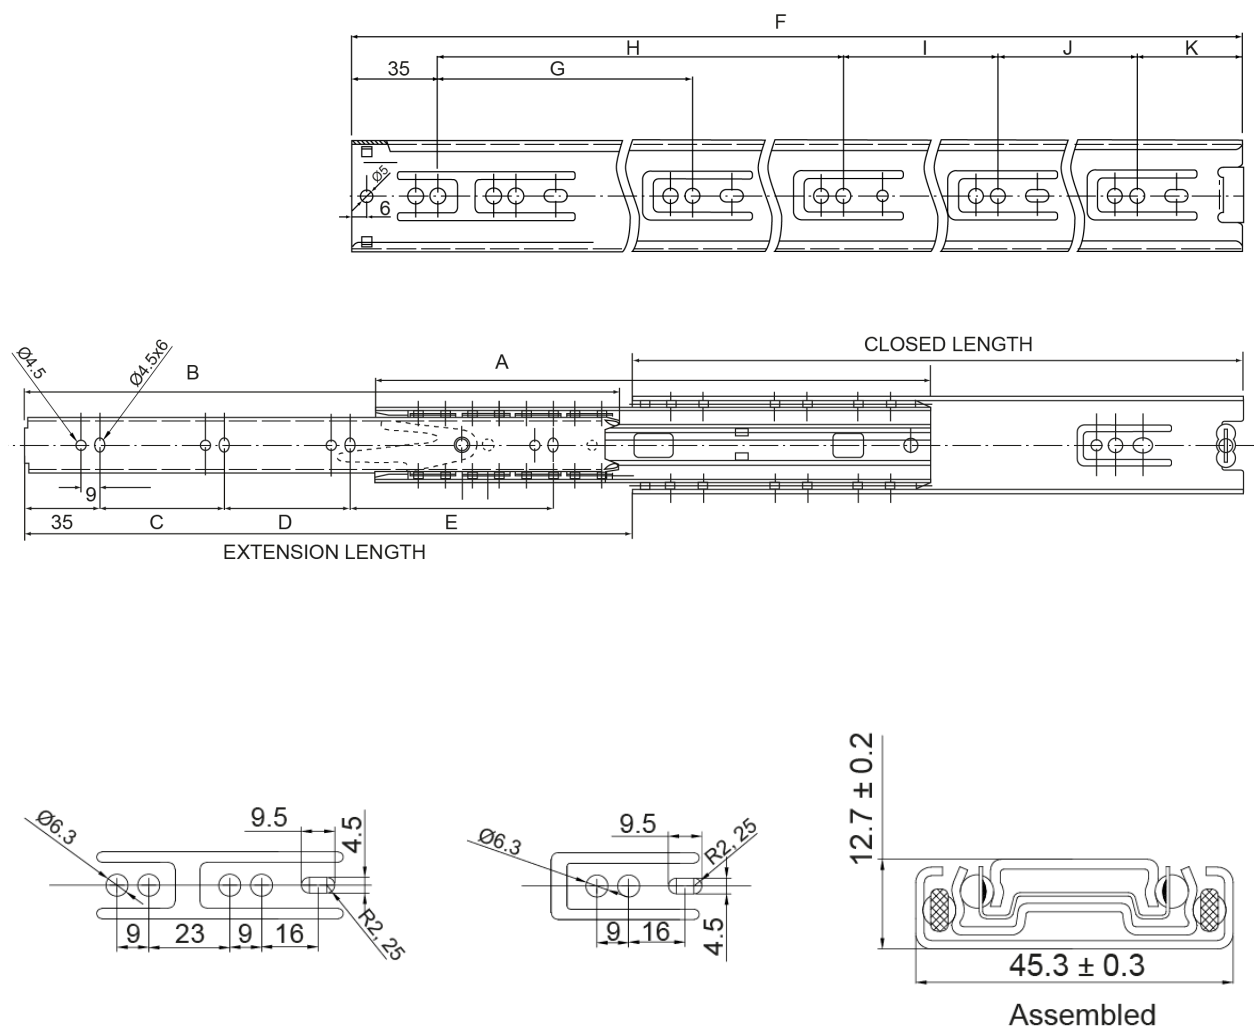

Designation	Closed Length	Extension Length	System Load Capacity (N)
3045-250	250	254	450
3045-300	300	305	450
3045-350	350	356	450
3045-400	400	406	450
3045-450	450	457	450
3045-500	500	508	400
3045-550	550	558	360
3045-600	600	609	320
3045-650	650	660	290
3045-700	700	711	260

Dimensions

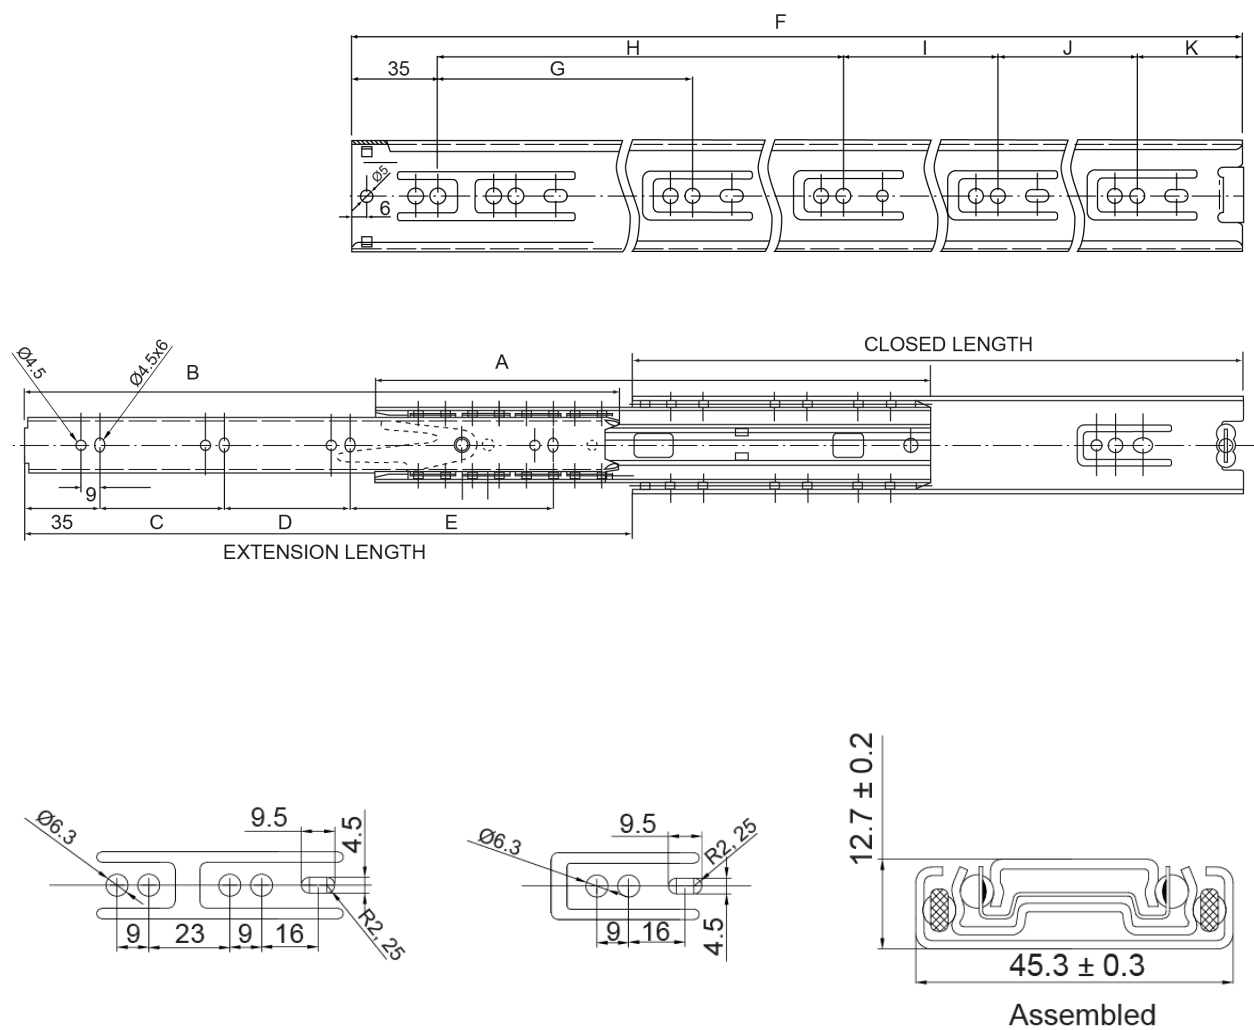

Designation	A	B	C	D	E	F	G	H	I
3045-250	234	248	96	96	-	250	160	-	-
3045-300	284	297	96	128	-	300	128	192	-
3045-350	334	347	96	64	96	350	128	224	-
3045-400	384	398	96	64	128	400	128	224	96
3045-450	434	448	96	96	160	450	128	224	128
3045-500	484	498	96	96	192	500	128	224	128
3045-550	534	547	96	128	224	550	128	224	128
3045-600	584	597	96	160	224	600	128	224	128
3045-650	634	647	96	160	256	650	128	224	128
3045-700	684	697	96	192	256	700	128	224	128

Dimensions

Designation	J	K
3045-250	-	55
3045-300	-	73
3045-350	-	91
3045-400	-	45
3045-450	-	63
3045-500	64	49
3045-550	96	67
3045-600	128	85
3045-650	192	71
3045-700	224	89